
ROTARY VANE VACUUM PUMP

Cooling System Development

Oil-Sealed Two-Stage Rotary Vane Vacuum Pump

DOCUMENT PURPOSE: Technical record of the engineering work, architecture, investigations, and open technical items.

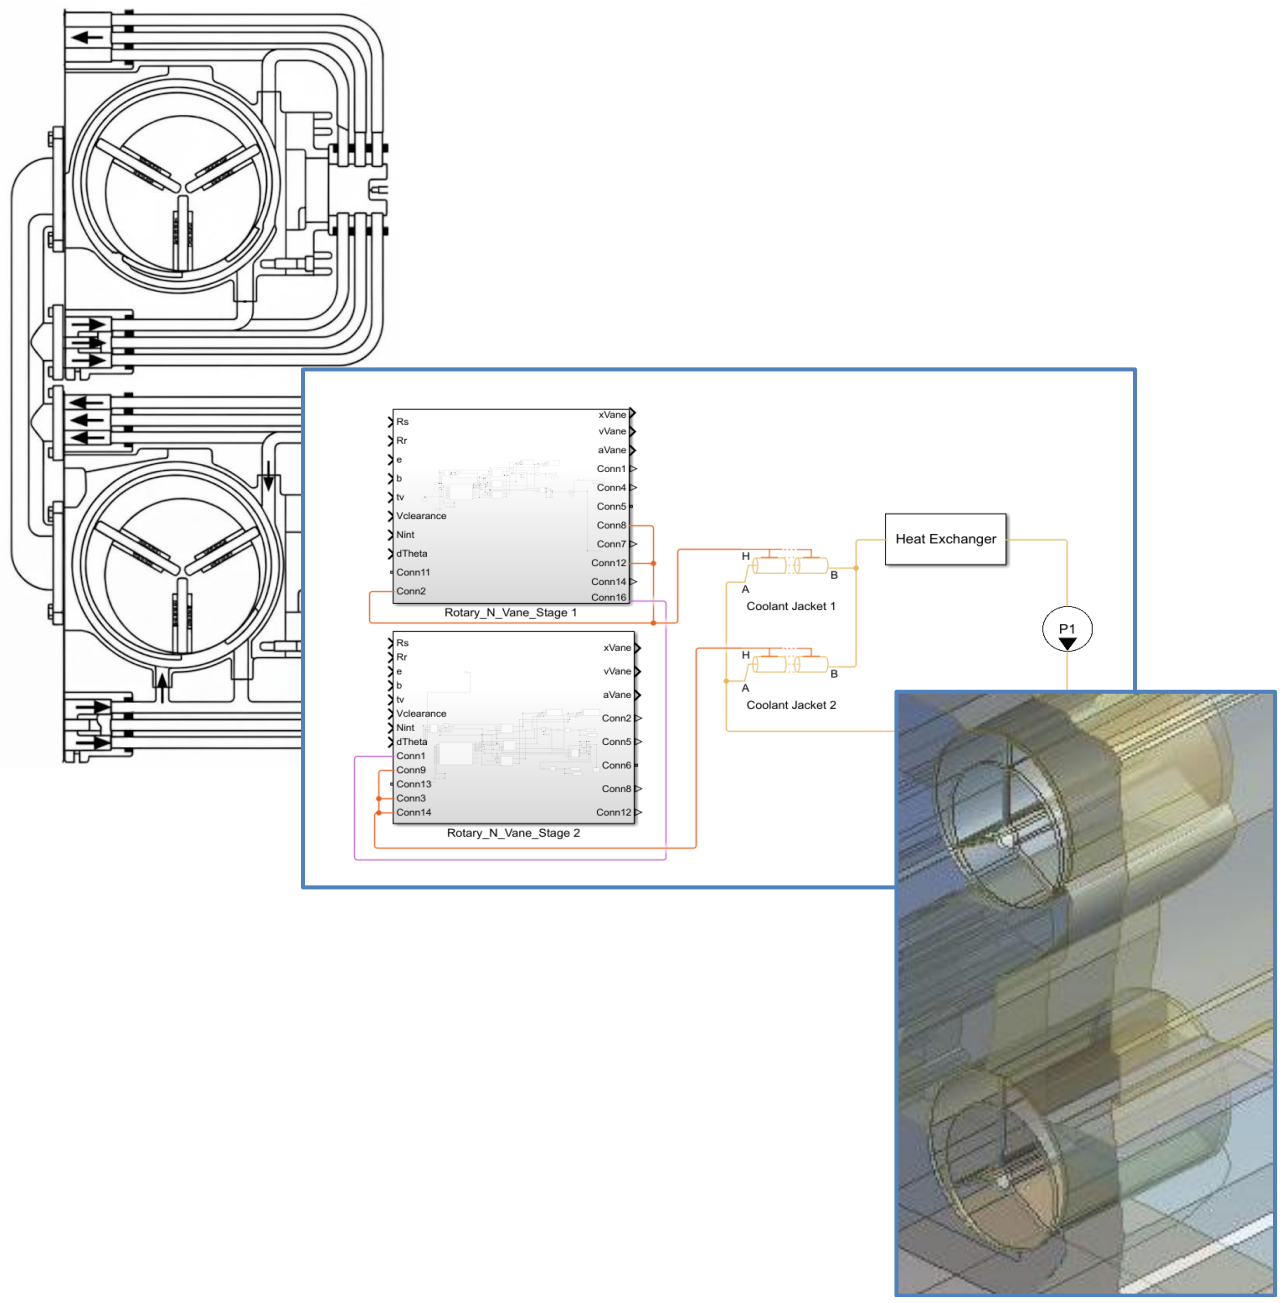

1. Executive Summary

This section summarizes the comprehensive thermal-fluid simulation, geometry & system optimization, and parameter modeling for a two-stage rotary vane vacuum pump operating within an advanced industrial cooling loop. The primary design objective is to achieve active thermal management across both compression stages, reducing localized thermal distortion, and optimizing overall performance.

Component	Details
Vacuum System	Two-Stage Rotary Vane Pump
Cooling System	Dual Integrated Water Jackets
Lubrication System	Fresh-Oil Lubrication Layout with Injection Network

The recent development work focused on two connected engineering tracks for an oil-sealed, two-stage rotary vane vacuum pump: (1) establishing a physically meaningful dynamic model of the rotor–vane–chamber system, and (2) investigating the pump cooling architecture and the appropriate scope for a cooling-system design study.

The cooling-system investigation considered the distinction between oil lubrication/sealing and external heat rejection, including water jackets, through water cooling, closed-loop radiator-fan circuits. The actual architecture of the selected pump still requires confirmation from its manufacturer documentation or a verified parts.

2. Two-Stage Vacuum System Representation

The portfolio scope identifies an oil-sealed two-stage rotary vane vacuum pump. A system-level model should therefore distinguish the low-vacuum (first) stage from the high-vacuum (second) stage and represent the inter-stage connection explicitly.

- Stage 1: suction-side chamber filling, compression, and transfer toward the inter-stage region.
- Inter-stage region: connecting volume and any relevant pressure losses or cooling/condensation effects supported by the actual pump design.
- Stage 2: further compression and discharge to the exhaust side.
- The exact stage arrangement, ports, internal bypasses, oil injection locations, and inter-stage cooling provisions must be taken from the selected pump's drawings.

3. Cooling-System Architecture Investigation

The thermal-system discussion examined what actually removes heat from an oil-sealed rotary-vane vacuum pump and whether water cooling is necessarily present. The key distinction is between oil's internal roles and the external heat-rejection mechanism.

3.1 Key engineering solutions

3.1.1 Outer Water Jacket: The primary jacket environment contained sinusoidal cooling fins designed for thermal exchange with air.

Engineering Change: To create a double water jacket system, these fins must be entirely enclosed by an Outer Shell. This forms a secondary water jacket around the main housing, allowing the coolant to pass through two distinct layers (an inner jacket near the stator and a secondary peripheral jacket).

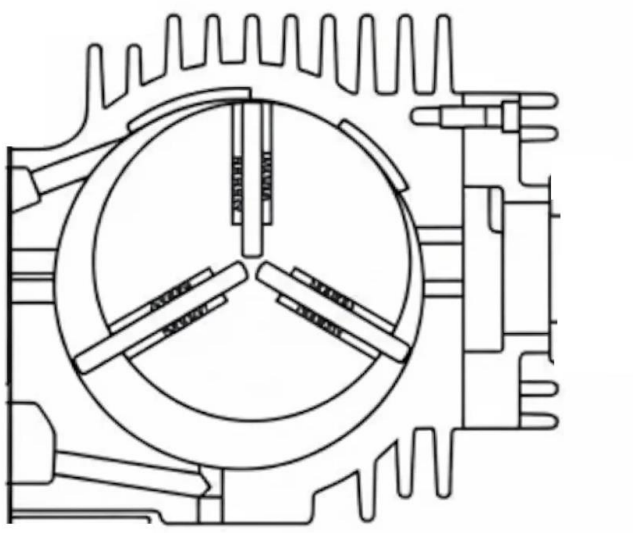


Figure 1: Air-Cooled Fins

3.1.2 Flow Circuit Separation for Two-Stage Pumps (Independent Stage Cooling)

Current Condition: The piping and fluid transfer conduits on the right side of the diagram are shown in a parallel, integrated layout.

Engineering Change: In a two-stage pump, the high-pressure stage generates significantly more heat than the first stage due to final gas compression. Therefore, the water circuit must be split into two independent loops:

i. Inner Circuit: Coolant flows directly through the critical, high-temperature stator region first.
ii. Outer Circuit: Coolant is routed to manage the overall body and end-cover temperatures to prevent non-uniform thermal distortion.

3.1.3 Manifold Block and Piping Optimization

Engineering Change: The thin parallel pipes on the right side introduce high pressure drops and are susceptible to dead zones. This assembly must be replaced with an Integrated Distribution Manifold that injects supply and return water at uniform flow rates and pressure distributions to both top and bottom jackets.

3.1.4 Installation of Flow Baffles and Turbulators

Engineering Change: To prevent laminar fluid movement within the jacket and increase the convective heat transfer coefficient (h), transverse baffles or engineered surface features must be installed in the space between the inner and outer jackets. This transitions the flow into controlled turbulence, significantly enhancing cooling efficiency.

3.1.5 Materials Engineering for the Double Water Jacket Assembly

i. **Stator Shell (Stator Core / Inner Wall):** Alloyed gray cast iron with spheroidal or flake graphite (EN-GJL-250 / GG-25) for dimensional stability and resistance to thermal deformation.
ii. **Outer Jacket Sleeve:** Cast aluminium (AlSi9Cu3) or stainless steel (AISI 304) to reduce weight and provide corrosion resistance against the cooling medium (water or water-glycol).
iii. **Inter-Jacket Seals (Gaskets / O-Rings):** Fluorocarbon-based elastomers (Viton / FKM) to withstand elevated temperatures and prevent leakage between cooling layers.

3.2 Information needed to finalize the cooling system

- Manufacturer and exact model designation of the two-stage pump.
- Manufacturer cooling requirements and allowable operating/ambient temperatures.
- Whether the pump has a water jacket, oil cooler, or air-cooled heat exchanger.
- Oil flow rate, oil temperatures, and available pressure drop (if an oil cooler exists).
- Coolant type, supply temperature, flow rate, pressure, and utility constraints.
- Heat load or a defensible estimate based on motor input, compression work, and measured temperature data.

4. Verification and Validation

Work package	Verification method	Acceptance evidence	Current status
Compressor Geometry	CFD & 1-D system simulations	Performance curves agree with reference.	numerical approach discussed; verification accepted.
Two-stage system	Check stage pressures, temperatures, inter-stage flow, rates	Physically consistent pressure progression and stable initialization.	System validation done.
Cooling circuit	Thermal balance, component sizing, pressure-drop calculation, and temperature measurement.	Required heat duty removed with acceptable temperatures and flow resistance.	System Optimized. (8% Improvement) / Validation test pending